

TVB-2406

TruVision HD-TVI Analog Bullet Camera, PAL, 1080p, 5 to 50 mm motorized lens with auto focus, true D/N, WDR, 100 m IR, IP66

Overview

The new TruVision line includes a comprehensive family of HD-TVI infrared (IR) cameras for stand-alone or integrated installations, designed for optimal image quality over existing coaxial cable.

Ideal for improving video quality of existing analog surveillance system installations ranging from convenience stores to retail mall parking lots, the TruVision HD-TVI line has the right cameras for your new or existing project and can help you stay within budget constraints without compromising security needs.

The cameras have true day/night capabilities, providing color images by day and black-and-white images under IR operation in low light applications. TruVision HD-TVI cameras are available with either fixed lens or varifocal lens or motorized lens

Form factors include box, dome, and traditional bullet cameras. Bullet models offer a familiar form factor that features a pre-installed wall mount with cable management. Bullet and domes are IP66 rated for outdoor installation and selected dome models are available with an IK10 vandal-rated enclosure.

All TruVision HD-TVI cameras are designed to install quickly and easily, right out of the box, so you can be up and running in no time.

Installation

The bullet and dome provide motorized lens control which facilitates installation and image adjustment. From the TVR12HD/44HD the installer can remotely control the focal length and precisely adjust the camera focus, simplifying both installation and maintenance.



Details

- 1080p HD resolution
- HD-TVI technology for transmitting HD quality video over existing coax cable
- True day/night functionality and infrared illuminators with Smart IR function for capturing images in various lighting scenarios
- IR range of up to 100 m
- IP66 environmental rating
- Wide dynamic range
- 5 to 50 mm motorized lens with auto focus
- Dual power 12 VDC / 24 VAC
- Bracket included
- Provide OSD control via TruVision up the coax and built-in menu button

TVB-2406

TruVision HD-TVI Analog Bullet Camera, PAL, 1080p, 5 to 50 mm motorized lens with auto focus, true D/N, WDR, 100 m IR, IP66

Technical specifications

General

Technology	HD-TVI analog
Video standard	PAL

Camera

Sensor size	1/3"
Max. resolution	1080p
Sensor scan	Progressive
Sensor type	CMOS
Total Pixels (H x V)	1920 x 1080
Effective pixels (H x V)	1920 x 1080
Digital S/N ratio	> 52 dB
Shutter time	1/25 to 1/50,000 s
Sync. system:	Internal
Video output:	Dual HD-TVI or 960H
Lens type:	5 - 50 mm @ F2, Motorized with auto focus
OSD:	Built-in OSD button, TruVision Coax OSD control on both HD-TVI and 960H

Lighting performance

WDR type	True WDR
WDR	120 dB
Digital noise reduction	3D DNR
Day/night	True Day/Night
Motorized IR cut filter	Yes
Color sensitivity	0.01 Lux @ (F1.2, AGC ON), 0.014 Lux @ (F1.4, AGC ON)
B/W sensitivity	0 Lux with IR on
Infrared (IR)	Yes
IR range	100 m

Encoding

Main stream compression	H.264
Sub stream compression	H.264, MJPEG

Lens

Lens type	Varifocal motorized
-----------	---------------------

Network

Integration	CGI, ONVIF, PSIA
-------------	------------------

Electrical

Power supply value	12 VDC / 24 VAC
Power consumption	12 VDC: max. 20 W
Current consumption	Max. 1.67 A @ 12 VDC

Physical


Physical dimensions	108.3 x 114.4 x 353.5 mm
Net weight	1.8 kg
Colour	Grey
Form Factor	Bullet

Environmental

Environment	Outdoor
Operating temperature	12VDC: -30 to +60 °C 24VAC: -40 to 60°C with heater on
Storage temperature	-20 to +70°C
IP rating	IP66

Regulatory

Compliance	C-tick, CE, FCC, REACH, RoHS, UL, WEEE
------------	--

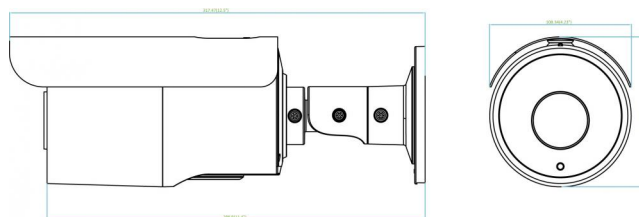

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 18 February 2020 - 17:23