

TVM-2002

TRUVISION 20" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920 x 1080

Overview

The LED TVM range of monitors is the latest advancement in TruVision monitors. Providing superior image quality through HDMI, VGA and BNC connections, these monitors are a great fit for today's demanding video surveillance market.

Whether displaying analog or IP resolutions, these monitors are designed to provide top image quality paired with industrial reliability.

These monitors are designed to perform 24/7 and are design with security applications in mind.

Capabilities

The TVM-2002 is a 20" class monitor, offering HDMI, VGA and BNC connections. The monitor has two built in speakers and is provided with VESA wall mount holes, making them easy to combine with a variety of TruVision mounting accessories. The on screen display allows for full control of images settings such as brightness, contrast and colour temperature.



Details

- 20" LED Backlight
- Full HD resolution
- 16:9 aspect ratio
- 1920 x 1080 recommended resolution
- 3,000:1 contrast ratio for crisp images
- 3D comb filter for optimal image quality
- Multiple inputs including BNC, VGA, HDMI
- BNC analog input

TVM-2002

TRUVISION 20" LED, VGA, HDMI, BNC, Audio Speaker, Stereo Audio In, FULL HD, 1920 x 1080

Technical specifications

Display

Screen size	19.53"
Aspect ratio	16:9
Contrast ratio	3,000:1
Viewing angle (H/V)	178° / 178°
Response time	20ms
Brightness	250 cd/m ² (typ)
Compatible video standards	NTSC/PAL Auto Detect
Recommended resolution	1920 x 1080 @ 60 HZ

Audio

Speaker power	1.5W x 2
Speakers	Built-in

Interface

BNC video I/O	1/1
VGA video in	Yes
HDMI video in	1
RCA audio in	1
PC stereo in	Yes
Audio out	No

Operations

Controls	Power, Up/Down, Left/Right, Source, OSD Menu
OSD	English, French, Spanish, German, Italian, Portuguese, Netherlands, Russian, Turkish, Polish
Remote control support	No

General

Technology	LED
VESA compatibility	100 x 100 mm
Filter type	3D Combfilter, Deinterlace
Included accessories	Manual, Power Cord
Panel lamp life	30,000 hours

Electrical

Power supply type	230 VAC
Power supply value	100 to 240 VAC
Power consumption	<30W

Physical


Physical dimensions	473 x 342 x 170mm
Net weight	2.8 kg
Shipping weight	3.6 kg
Colour	Black
Housing Type	Plastic

Environmental

Operating temperature	0 to 40°C
Storage temperature	-20 to 60°C
Relative humidity	10 to 85%
Environment	Indoor

Standards & regulation

Compliance	CE
------------	----

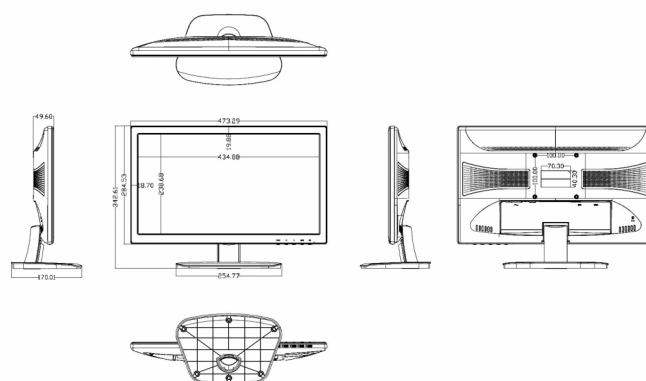

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 11 March 2020 - 10:55