

# TVN-2232P-36T

## TruVision™ NVR 22P recorder, 32 IP channels, 36TB, H.265 NVR, 2U

### Overview

TruVision NVR 22P (TVN 22) is a robust high performance H.264/H.265 network video recorder. With a total bandwidth of 256 Mbps (16-channel) or 320Mbps (32- and 64 channel) available, the TVN 22P is able to connect up to 16/32/64 IP cameras and provide real time recording (25/30 fps) at Full HD 1080p resolution on all channels simultaneously. With its fully flexible bandwidth allocation, the TVN 22P allows recording resolutions up to 8MPX at various frame rates.

### Ease of use

TVN 22P was designed to make system configuration and overall use easier for both the installer and end-users through features such as: ezDDNS, start-up wizards, plug & play hard drives, auto discovery of natively supported cameras and is fully compatible with TruVision Navigator (as of 6.0SP1) and TVRmobile.

### H.265

The TVN 22P is supporting both H.264 and H.265 compression techniques. The H.265 compression is the next evolution of video encoding. Using H.265 will result in a reduced file size for the same video content and a reduced transmission bandwidth compared to H.264. This means that for the same storage capacity more video can be stored when using H.265 than H.264 encoding. To use the H.265 encoding in the TVN 22, TruVision H.265 cameras need to be used.


### Ease of use

Thanks to its 2U housing, the maximum on-board storage capacity for the TVN 2232P is 64 TB, using eight 8 TB hard drives. The hard drives can be accessed via the lockable front panel door, allowing customers to easily expand storage as their system and/or requirements grow. Additionally, TVN 22P supports RAID 0,1, 5, 6 and 10 for storage redundancy. The supported RAID levels depend on the number on hard drives. Recording options include continuous, event and alarm. The three modes can be combined, to ensure that the most efficient recording is possible.

### Basic intrusion integration

TVN 22P has an alarmreceiver module embedded inside. The alarm message receiver can connect to up to three Interlogix IP intrusion panels that report in SIA or XSIA format.

Alarm messages, disarming and arming messages can be send from the alarm panel to the recorder, which then can take actions (trigger alarm recording, send a PTZ to a preset, run a shadow tour or preset tour, trigger an alarm output or send a notification message to TVRmobile). Also the heartbeat message between panel and recorder is monitored. This solution offers straightforward alarm verification and is free of charge.



### Details

- Linux embedded Plug and Play configuration
- Up to 320 Mbps camera recording bandwidth
- Up to 32 IP channels
- Up to 64TB embedded storage (8x 8TB)
- RAID 0, 1, 5, 6, 10 support (depending on the number of HDDs used)
- Flip-open front panel for easy HDD access, servicing and expansion
- New icon based front panel
- Real time Full HD recording
- Motion detection, VCA, privacy masking, tamper detection
- TruVision IP camera auto-discovery
- Third party camera support via ONVIF and PSIA
- IP camera configuration import/export
- Custom protocol configuration (RTSP streaming)
- Network redundancy
- Integration of UTC IP intrusion panels via SIA/XSIA reporting
- Recorder failover functionality (one failover unit per 4 operational recorders)
- TVK-800 IP Keypad support (no support for local display of H.265 cameras)
- USB DVD burner support
- Full browser-, OSD- and software-based access for live, recorded & configuration
- TVRmobile app for iOS and Android
- TruVision Navigator license-free client/host or standalone application

# TVN-2232P-36T

## TruVision™ NVR 22P recorder, 32 IP channels, 36TB, H.265 NVR, 2U

### Technical specifications

#### General

|                        |     |
|------------------------|-----|
| Rack mountable         | Yes |
| Rack stacking size     | 2 U |
| Removable fan          | No  |
| Redundant power supply | No  |

#### Video/audio input

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| Camera channels                       | 32                                       |
| IP camera channels                    | 32                                       |
| Max. bandwidth per channel            | 16                                       |
| Camera bandwidth                      | 320                                      |
| Max. IP audio in                      | 32                                       |
| Max. analog audio In                  | 1-ch, RCA ( 2.0 Vp-p, 1 kohm )           |
| Supported video compression standards | H.264, H.265, MPEG-4                     |
| Supported video streaming standards   | Onvif, PSIA, RTSP, RTSP Custom Protocols |

#### Local viewing

|                                     |                   |
|-------------------------------------|-------------------|
| HDMI output                         | 2                 |
| HDMI version                        | 2.0               |
| VGA output                          | 2                 |
| BNC output                          | 1                 |
| Max. local output resolution        | Full HD 1080p     |
| Synchronous playback OSD (channels) | Up to 16 channels |
| Reverse playback OSD (channels)     | 1                 |

#### Remote viewing

|                                         |                                                              |
|-----------------------------------------|--------------------------------------------------------------|
| Total available viewing bandwidth       | 256                                                          |
| Max. live viewing streams               | 128                                                          |
| Max. playback viewing streams           | 128                                                          |
| Max. playback resolution                | 8 MPX                                                        |
| web browser                             |                                                              |
| Max. simultaneous playback web browser  | Max. 16 tiles (4x4)                                          |
| Reverse playback web browser (channels) | Up to 9 channels, depending on PC performance                |
| Software compatibility                  | Advisor Manager, TruVision Navigator, TVRmobile, Web Browser |
| Browser compatibility                   | Internet Explorer                                            |

#### Storage

|                                 |                                                       |
|---------------------------------|-------------------------------------------------------|
| Storage capacity                | 36 TB                                                 |
| SATA interfaces                 | 8                                                     |
| Max. capacity per SATA HDD (TB) | 6                                                     |
| Maximum recording resolution    | 12 MPX                                                |
| Recording modes                 | Alarm, Event, Manual, Time-lapse high, Time-lapse low |
| External storage                | eSATA, NAS, SAN                                       |
| Supported RAID levels           | RAID 0, RAID 1, RAID 10, RAID 5, RAID 6               |
| Hard drive redundancy           | Yes                                                   |
| Hard drive grouping             | Yes                                                   |
| SAS extension                   | No                                                    |
| Flip-open front panel           | Yes                                                   |
| Auto archiving                  | Yes                                                   |
| Hot spare recorder              | Yes                                                   |
| Edge failover recording         | Yes                                                   |

#### Networking

|                               |                                                         |
|-------------------------------|---------------------------------------------------------|
| Network interface cards (NIC) | 2                                                       |
| NIC type                      | RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| NIC mode                      | Network Redundancy                                      |
| Network ports per NIC         | 1                                                       |
| DNS support                   | DDNS, ezDDNS, No-IP                                     |
| HTTPS support                 | Yes                                                     |

#### External interfaces

|                           |        |
|---------------------------|--------|
| USB interface back        | 1      |
| USB interface front       | 2      |
| Serial interface          | RS-232 |
| Alarm inputs              | 16     |
| Alarm outputs             | 4      |
| Max. analog audio outputs | 1      |

#### Electrical

|                                   |                |
|-----------------------------------|----------------|
| Power supply type                 | 100 to 240 VAC |
| Power consumption without HDD (W) | <=30 W         |

#### Physical

|                     |                   |
|---------------------|-------------------|
| Physical dimensions | 442 × 442 × 92 mm |
| Colour              | Black             |

#### Environmental


|                       |                                |
|-----------------------|--------------------------------|
| Operating temperature | -10 to +55°C (14 °F to 131 °F) |
| Relative humidity     | 10 to 90%                      |

#### Standards & regulation

|            |                     |
|------------|---------------------|
| Compliance | CE, REACH, RoHS, UL |
|------------|---------------------|

# TVN-2232P-36T

TruVision™ NVR 22P recorder, 32 IP channels, 36TB, H.265 NVR, 2U

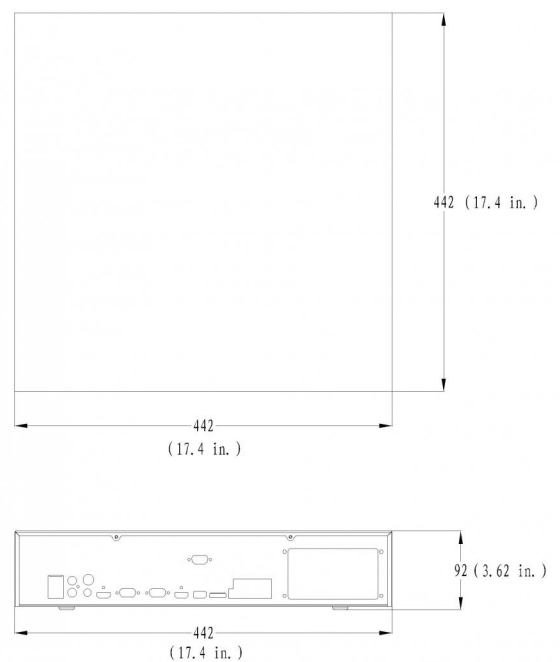

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 7 April 2020 - 10:30