



Overview

The Paxton10 Video Controller combines both the Single Door Controller and a video recorder into one unit. Removing the need for any additional integration, the video controller makes installing an access control system with video recording a seamless and simple task.

Two SATA hard drives can be installed simultaneously in a RAID1 configuration.

Features

- All the same functionality as a Single Door Controller
- Built in video recorder with expandable storage
- Simple plug and play installation
- Power Options: PoE+, 230V, 12V or 24V
- Locally stored programming enables the system to continue working if connection to the server is lost
- 5 year warranty
- Backup battery connectors
- Powered lock output
- Simple and intuitive connectivity

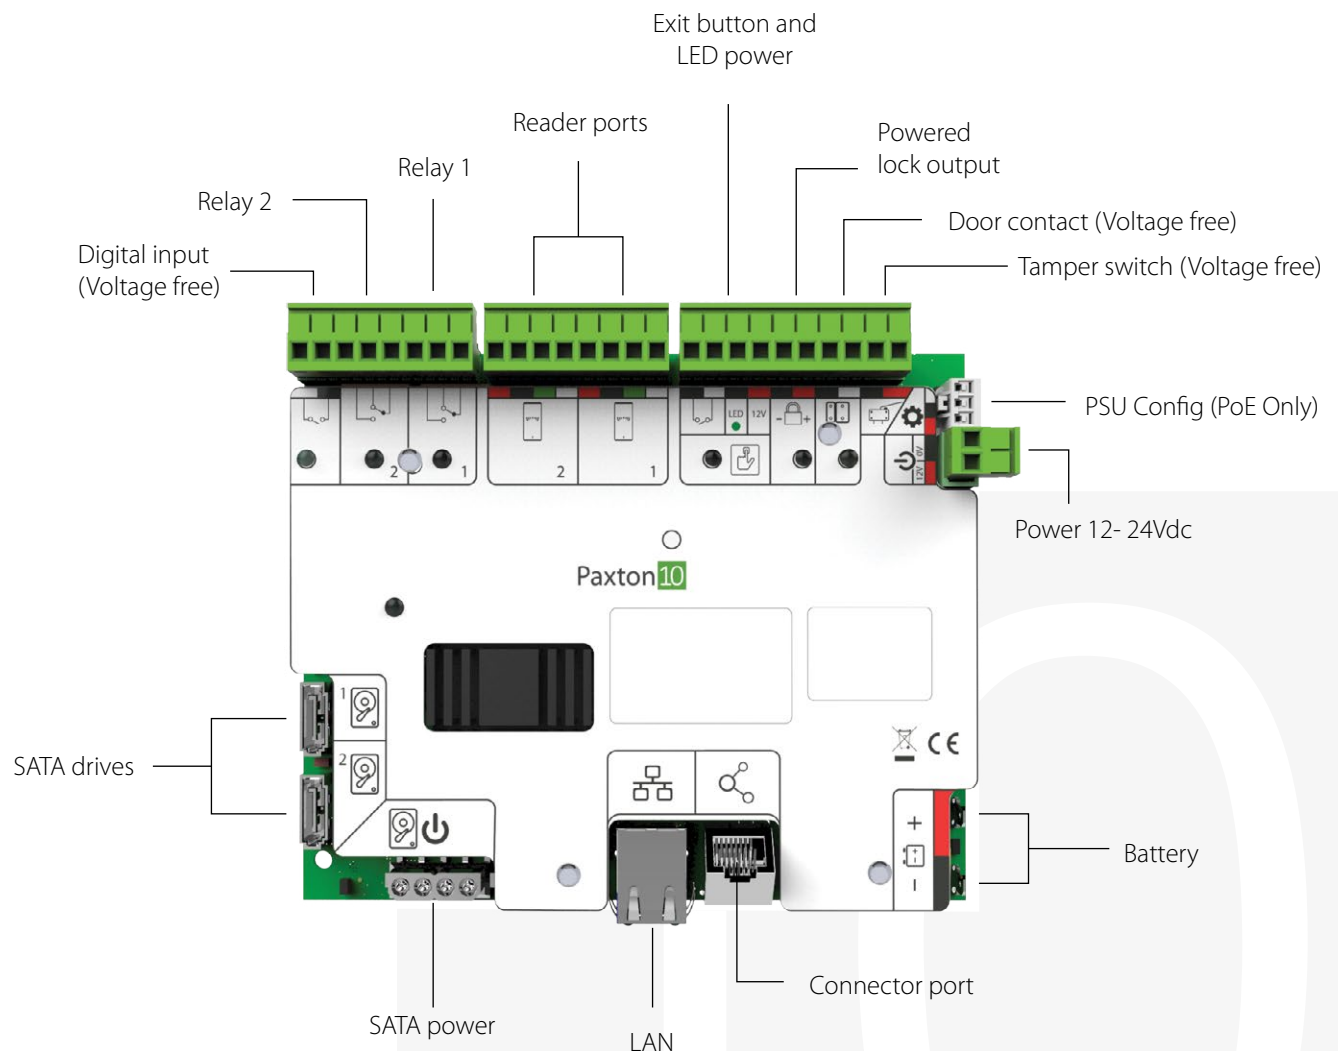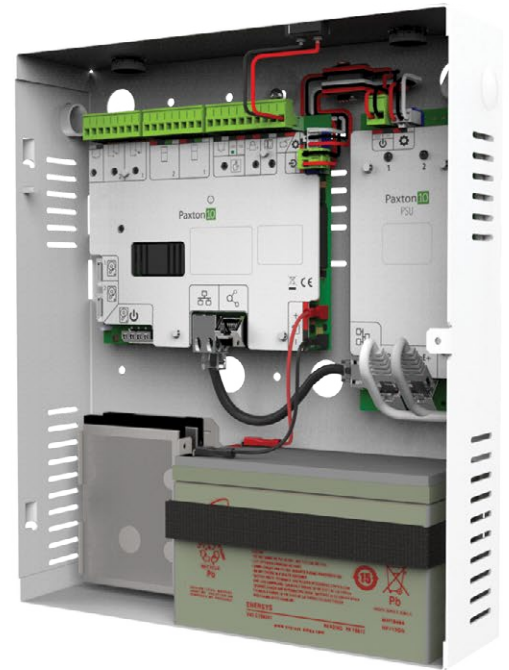



Electrical

Power consumption	
While battery charging	Idle - 114mA/5.9W
	Max - 160mA/8.3W
While battery full	Idle - 74mA/3.87W
	Max - 122mA/6.39W
Backup battery	12VDC, 7Ah (Optional)
Lock output	12Vdc/1A or 24Vdc/500mA
Relay rating	30V dc/ 2A
RS485 connector output	24VDC, 750mA max (Paxton connectors only)
RS485 reader output	12VDC, 1A max (Paxton readers only)
Controller input voltage	12 - 24Vdc (suppression at 28V)
PoE Power Supply	INPUT: 42.5-57 VDC, 25.5W (IEEE 802.3at Type 2)
	OUTPUT: 12.8VDC, 3.6A
4A Power Supply	INPUT: 100-240 VAC, 50/60Hz, 1.5A
	OUTPUT: 12.8VDC, 4A



Communication

Data connection	IP
-----------------	----



Hardware

Dimensions (W x H x D)	275mm x 320mm x70 mm
Door contact input	Yes
Voltage free digital input	1
Exit button input	Push to make
Tamper input	Yes
Relays	2
Maximum number of readers/keypads per door	2
Warranty	Paxton 5 year
Video storage	2 x SATA inputs for RAID1 configuration (drives not included)
Max storage capability	2TB (Local via SATA or remote)



Environment

Operating temperature	0°C - 45°C
IP Rating	N/A
Mounting	Wall