

ZP887

ZP7 Series Compatible Intelligent Addressable Manual Call Point - Weatherproof Red

General

The ZP780 Series is an intelligent ZP7 range of addressable manual call points. The ZP885 is a red, single action weatherproof MCP. It is delivered complete with resettable element, test connector and test key. Multiple optional accessories are available to facilitate most indoor installation requirements

Aesthetics

This weatherproof single action MCP is a standard profile, outdoor MCP suitable for surface mount installations using the back box supplied with the product. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view. The clean face of the MCP is further enhanced by a front access & test key facility that allows access to the activation element that can be either frangible or resettable.

Configuration Friendly

Electronic configuration and addressing is possible wirelessly (powered or unpowered)

Installation & Maintenance Friendly

The front facing access for an aesthetically matching, red MCP test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover.

Compatibility

The DM3000 series supports new and legacy Ziton ZP7 systems. They can be deployed seamlessly into existing legacy systems without CIE configuration changes.



Details

- Reliable single action manual call point for surface mounting
- A dual, tri-colour status indicator offers 180° alarm visibility
- Tamper resistant design with resettable or frangible element
- Unobtrusive front facing test facility
- Outdoor rated, waterproof enclosure
- Back box with top and bottom cable entry
- Screen connection terminal for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- Alarm flag on the face of the MCP allows maintenance indication even without alarm indicators
- Fast, no-tools-required maintenance using the test key
- Local system intelligence for full configuration flexibility
- Electronic addressing for 127 addresses
- Unpowered wireless setup, configuration and reporting
- Wireless commission and diagnostics reporting
- Local event, manufacturing and service logs

ZP887

ZP7 Series Compatible Intelligent Addressable Manual Call Point - Weatherproof Red

Technical specifications

General

Status indication	Dual LEDs Alarm (Red Blinking) Isolated (Yellow Blinking) Fault (Yellow Blinking) Communication (Green Blinking)
User interface	LEDs, Alarm flag
Compatibility	Ziton ZP7 systems
Event log	32 Events
Connectivity	Loop protocol & RFID
Addressing method	Electronic

Electrical

Power supply type	Loop powered
Operating voltage	16 to 42 VDC
Current consumption	290 µA (Quiescent) 1 mA (Alarm)

Detection

Detection principle	Push button/switch
Monitoring	Device type, Presence

Physical

Physical dimensions	108 × 108 × 69 mm
Net weight	252 g
Colour	Red (RAL 3028)
Mounting type	Back box, Wall mount
Cable entries	3
Cable specification	0.404 to 2.05 mm
No. of cable cores	2
Terminals	4 (A+/A-;B+/B-)
Functional marking	House on Fire
Backbox cable entry	1 × threaded MK20 (Top or bottom) 2 × threaded MK20 (Bottom or top)

Environmental


Vandal proof	No
Operating temperature	-25 to +72°C
Storage temperature	-25 to +72°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor / Outdoor
IP rating	IP67

Standards & regulation

Compliance	CE, REACH, RoHS 2, WEEE
Certification	EN54-11
Standards	CPR Certified

Standards & Regulation

Voluntary marks	A+
-----------------	----

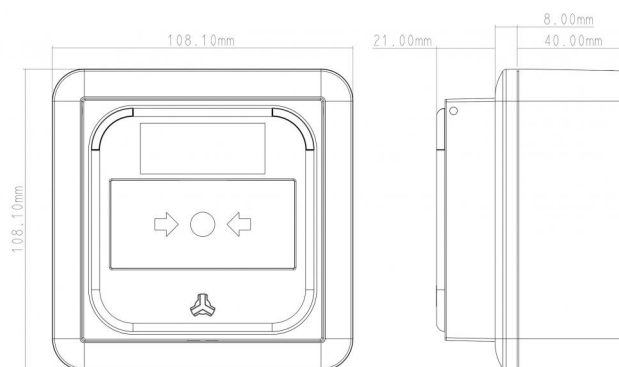

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 6 September 2019 - 6:48

