

DM3000WS99

2000 Series Intelligent Addressable English Manual Call Point - White

General

The DM3000 Series is an intelligent 2000 Series range of addressable manual call points. The DM3000WS99 is a white, single action indoor MCP with an "ABORT EXTINGUISHING SYSTEM" functional indicator. It is delivered complete with resettable element, test connector and test key. Multiple optional accessories are available to facilitate most indoor installation requirements.

Aesthetics

This single action MCP is a standard profile, indoor MCP suitable for surface and flush mount installations using standard or legacy European electrical boxes. With its designer dual, tricolour LEDs it offers 180°, clear local indication of its operational status, even from a side view in a passage installation. The clean face of the MCP is further enhanced by a front access & test key facility that allows access to the back box and cabling, making additional fastening screw holes obsolete.

Configuration Friendly


Electronic configuration and addressing is possible wirelessly (powered or unpowered)

Installation & Maintenance Friendly

The front facing access for an aesthetically matching, red MCP test key allows unhindered access regardless of the installation location. The MCP key doubles as a test and disassembly tool allowing removal of the MCP front cover and access to the back box and cables without the need for additional tools.

Compatibility

The DM3000 supports new and legacy Aritech 2000 systems. They can be deployed seamlessly into existing legacy systems without CIE configuration changes.

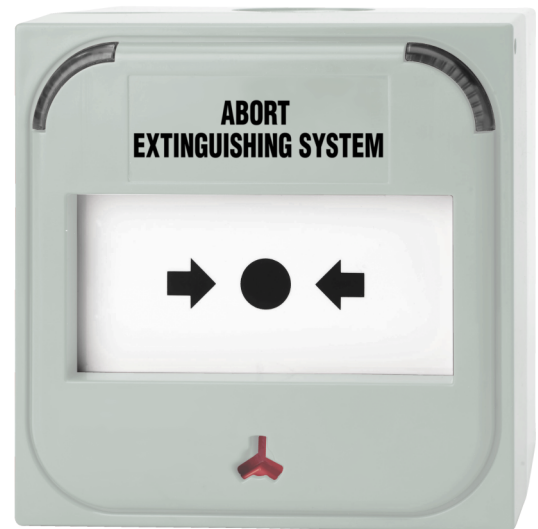

Details

- Reliable single action manual call point for surface and flush mounting
- Dual, tri-colour status indicators offers 180° alarm visibility
- Tamper resistant design with resettable or frangible element
- Unobtrusive front facing test facility
- Standard mounting options facilitates easy retrofitting to existing installations
- Back box with rear, top and bottom cable entry
- Screen connection terminal for electrically noisy installations
- Pluggable connector with link through facility for ease of installation and pre-commissioning testing
- An alarm flag on the face of the manual call point allows alarm indication even without alarm LEDs
- Fast, no-tools-required maintenance using the test key
- Integrated quad short circuit isolators for security and maintenance
- Local system intelligence for full configuration flexibility
- Electronic addressing for 128 addresses
- Unpowered wireless setup, configuration and reporting
- Wireless commission and diagnostics reporting
- Local event, manufacturing and service logs

DM3000WS99

2000 Series Intelligent Addressable English Manual Call Point - White

Technical specifications

General

Status indication	Dual LEDs Alarm (Red Constant) Isolated (Yellow Constant) Fault (Yellow Blinking) Communication (Green Blinking)
User interface	LEDs
Compatibility	Aritech 2000 systems
Event log	32 Events
Connectivity	Loop protocol & RFID
Addressing method	Electronic

Electrical

Power supply type	Loop powered
Operating voltage	16 to 42 VDC
Current consumption	200 µA (Quiescent) 2.9 mA (Alarm)
Cable specification	0.404 to 2.05 mm
No. of cable cores	2
Terminals	4 (A+/A-;B+/B-)

Detection

Detection principle	Push button/switch
---------------------	--------------------

Physical

Physical dimensions	87 × 87 × 26 mm (w/o back box) 87 × 87 × 57 mm (w/ back box)
Net weight	110 g (w/o back box) 170 g (w/ back box)
Colour	White (RAL 9003)
Mounting type	Back box, Recessed mount, Wall mount
Cable entries	4
Material (body)	Flame retardant ABS
Functional marking	ABORT EXTINGUISHING SYSTEM
Back box cable knockouts	1 × Ø 20 mm (Back) 1 × Ø 25 mm (Top) 2 × Ø 20 mm (Bottom)

Environmental


Vandal proof	No
Operating temperature	-25 to +72°C
Storage temperature	-25 to +72°C
Relative humidity	10 to 95% noncondensing
Environment	Indoor
IP rating	IP41

Regulatory

Compliance	CE, REACH, RoHS 2, WEEE
Certification	CE

Standards & Regulation

Voluntary marks	A+
-----------------	----

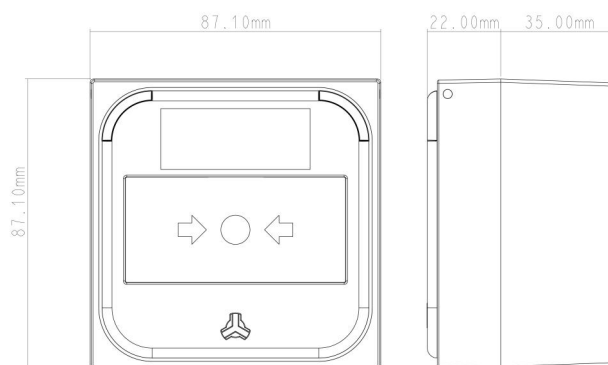

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 10:31