


EST-xAudI-8

8 audio input card for function slot

Overview

This audio input extension card is destined for a function slot of EST-CU-8LCD. It offers 8 symmetrical line audio inputs via an RJ45 connector.

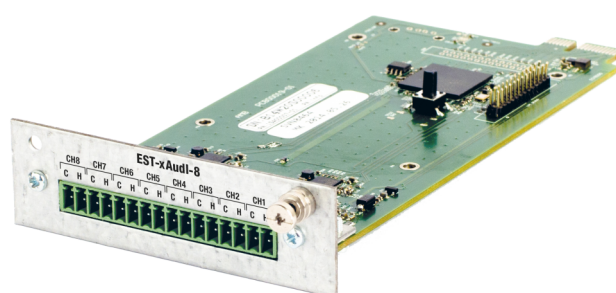

EST-xAudI-8

8 audio input card for function slot

Technical specifications

Electrical

Current consumption	25 mA at 48 V
Source of power	EST-CU-8LCD Control Unit main backplane

Input

Quantity and type	8, Differential
Type of connector and number of audio inputs	Screw terminals PHOENIX 16 pin -type, 3,5 mm
Input impedance	$\geq 10 \text{ k}\Omega$
Input voltage	3 Vrms max.

Physical

Physical dimensions	70 x 160 x 25 mm (W x H x D)
---------------------	------------------------------

Environmental

Operating temperature	0°C to +60°C
Storage temperature	-20°C to +70°C
Operating humidity	15% to 80% non-condensing
Storage humidity	5% to 95% non-condensing

Standards & regulation

Standards	EN54-16
-----------	---------