


EST-XLOGOUT-8C

8 logical outputs card (control slot)

Overview

The logical output card has eight fully programmable relays which can be used for acknowledge the various states of the EST ENT VES outside to other systems. The channels from 1 to 4 are equipped with NC and channels from 5 to 8 with NO type of relays.

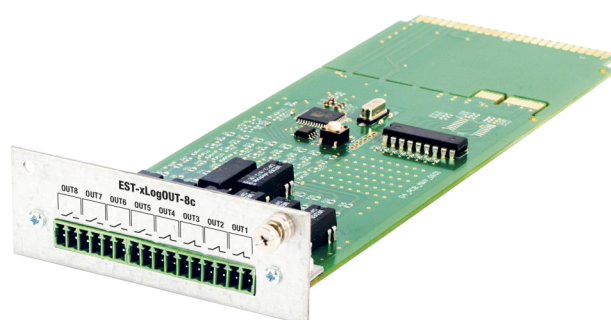

EST-XLOGOUT-8C

8 logical outputs card (control slot)

Technical specifications

Electrical

Current consumption	10 mA at 48 V
Power supply	Internal from the Control Unit
Switching current	0.5 A max.
Switching voltage	48 V max.
Switching power	20 W max.

Output

Number of logic outputs	8, each
Type of outputs	4x NC; 4x NO
Connector type	16 pin screw terminal type PHOENIX, 3.5 mm

Physical

Physical dimensions	70 x 215 x 25 mm (W x H x D)
Accessories	Connector with screw terminals 16 pins, the distance between the partitions of 3.5 mm

Environmental

Operating temperature	0°C to +60°C
Storage temperature	-20°C to +70°C
Operating humidity	15% to 80% non-condensing
Storage humidity	5% to 95% non-condensing

Standards & regulation

Standards	EN54-16
-----------	---------