FP-3000

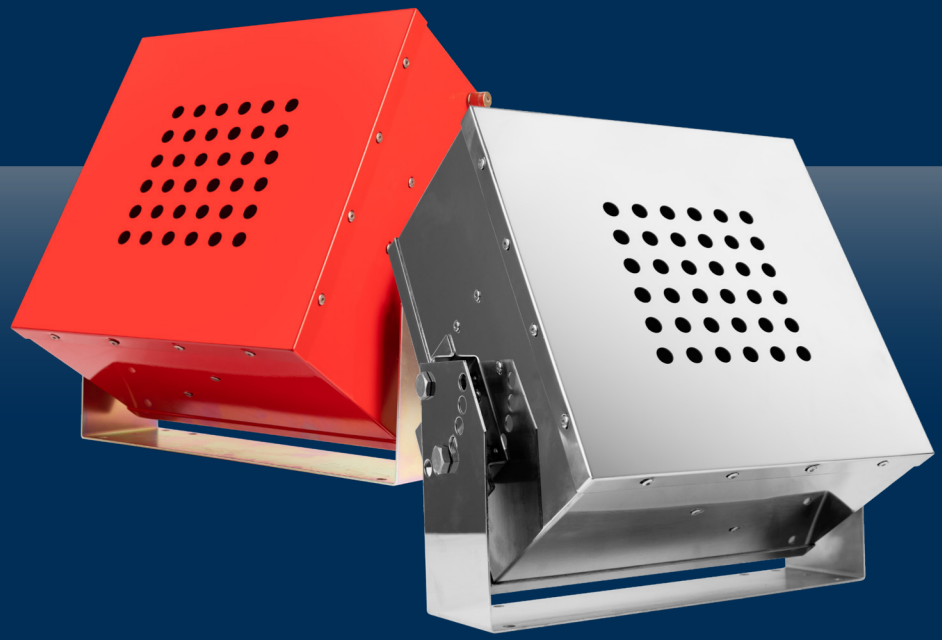

FP-3000

Product Code: 10150

Product Description:

- FirePro Fire Extinguishing Generator FP-3000

Features:

- LPCB, UL, KIWA, MED & BSI Certified
- Carbon steel, red-coated casing

FP-3000T

Product Code: 10318

Product Description:

- FirePro Fire Extinguishing Generator FP-3000T

Features:

- LPCB, UL, KIWA & BSI Certified
- This model can be activated thermally (optional)
- Carbon steel, red-coated casing

FP-3000S

Product Code: 10393

Product Description:

- FirePro Fire Extinguishing Generator FP-3000S

Features:

- LPCB, UL, KIWA, MED & BSI Certified
- Stainless steel casing

FP-3000TS

Product Code: 10624

Product Description:

- FirePro Fire Extinguishing Generator FP-3000TS

Features:

- LPCB, UL, KIWA & BSI Certified
- This model can be activated thermally (optional)
- Stainless steel casing

TECHNICAL INFORMATION

Model	FP-3000 / FP-3000S / FP-3000T / FP-3000TS
Activation method	• Electrical • Thermal (FP-3000T/ FP-3000TS)
Weight (gross)	16,300 g (excluding bracket)
Mass of FPC compound	3,000 g
Operational discharge time	15 - 20 seconds
Dimensions	300 mm x 300 mm x 185 mm
Fire class	EN 2: A, B, C, F - NFPA 10: A, B, C

Generators are provided complete with brackets