


NC2051

1200/2000 Series - Accessory - Fibre Optic ARCNet Network Card

General

The NC2051 is an interface board to connect a fiber optic network directly into the 1200/2000 series fire panels. It is supplied with one NE2051 pre installed.

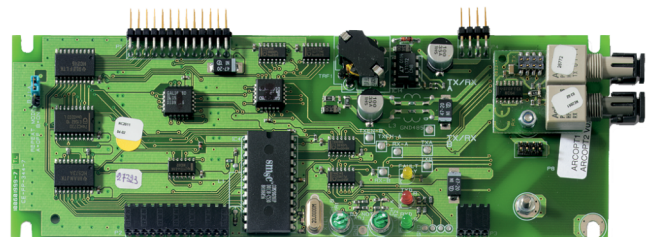

Details

- Allows a fiber optic interface on the FP1200/2000
- No configuration required
- Supplied with nuts and washers for easy installation
- Full Class-A ring option available with NE2051
- Mixed network support (copper and fibre) with NE2011

NC2051

1200/2000 Series - Accessory - Fibre Optic ARCNet Network Card

Technical specifications

Electrical

Current consumption	35 mA
---------------------	-------

Physical

Form factor	Medium
Dimensions	190 x 64 mm
Weight	85 g

Environmental

Storage temperature	-10°C to +70°C
Operating temperature	-10°C to +50°C
Relative humidity	10% to 95%

Regulatory

Certification	EN54-2
---------------	--------



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 9:31